



EE Series


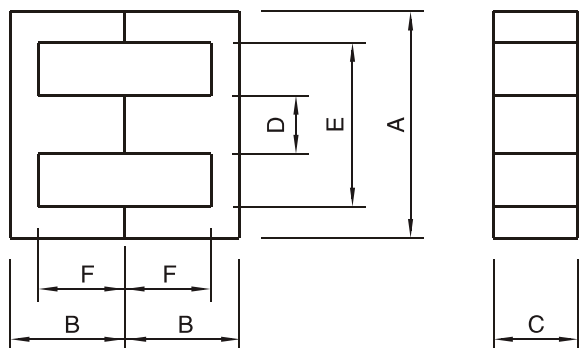


PC40 **EE16**
 | |
 Material Core Size
 OD×ID×HT

(MATERIALS): PC30 , PC40 , PC95 , H10K
 Dimensions & Effective parameter

| Type | Dimension(mm) | | | | | | Weight (g) | Effective parameter | | | | AL(nH/N ²) | | | | | |
|---------------|--------------------------------------|-----------------------------------|------------------------------------|-----------------------------------|------------|-----------------------------------|---------------|---------------------|-------|--------------------|--------------------|------------------------|----------|----------|----------|----------|----------|
| | A | B | C | D | E min | F | | C1 | Le | Ae | Ve | PC30 | PC40 | PC95 | H5K | H7K | H10K |
| | | | | | | | | (mm ⁻¹) | (mm) | (mm ²) | (mm ³) | | | | | | |
| EE6.5 | 6.75±0.2 | 3.25±0.15 | 3.0±0.15 | 1.3±0.15 | 5.1 | 2.55±0.15 | 0.8 | 3.85 | 16.23 | 4.21 | 68.35 | | | | | | 1000±25% |
| EE8.3 | 8.7±0.3 | 4.1±0.2 | 3.9±0.2 | 1.85±0.15 | 6.1 | 3.1±0.2 | 1 | 2.75 | 19.2 | 7 | 134 | 900±25% | 700±25% | | 1200±25% | 1300±25% | 1500±25% |
| EE10A | 10.2±0.3 | 5.5±0.2 | 4.75±0.15 | 2.45±0.15 | 7.9 | 4.2±0.2 | 1.9 | 2.16 | 26.1 | 12.1 | 315 | 940±25% | 800±25% | | 1700±25% | 2000±25% | 2300±25% |
| EE10B | 10.5±0.5 | 5.5±0.15 | 9.8±0.3 | 2.4±0.3 | 7.6 | 4.3±0.2 | 4 | 1.1 | 26.4 | 23.1 | 611.6 | 2500±25% | 1900±25% | | | | |
| EE12 | 11.9±0.4 | 6.5±0.3 | 3.7±0.2 | 2.5±0.2 | 8.6 | 4.9±0.3 | 1.9 | 3.19 | 29.55 | 9.25 | 352.3 | | | | | | 3000±25% |
| EF12.2 | 12.2±0.3 | 5.2±0.3 | 4.0±0.3 | 3.2±0.2 | 8.8 | 3.8±0.2 | 1.84 | 2 | 25.5 | 12.8 | 337.9 | | | | | | 3000±25% |
| EF12.6 | 12.6±0.4 | 6.4±0.2 | 3.6±0.2 | 3.6±0.2 | 9 | 4.7±0.2 | 2.3 | 2.39 | 29.69 | 12.4 | 367 | | | | 1660±25% | 2100±25% | 3500±25% |
| EE13A | 13.2±0.4 | 6.3±0.3 | 6.0±0.3 | 2.7±0.3 | 10 | 4.7±0.3 | 3.4 | 1.86 | 30.2 | 16.2 | 586 | 1200±25% | 1000±25% | | 2200±25% | 2700±25% | 3100±25% |
| EE13B | 13.2±0.4 | 6.3±0.3 | 9.8±0.3 | 2.7±0.3 | 9.8 | 4.7±0.3 | 5.6 | 1.13 | 29.95 | 26.46 | 975 | 2600±25% | 2200±25% | | | | |
| EE13C(H) | 13.3±0.4 | 6.15±0.15 | 6.1±0.3 | 2.7±0.3 | 10 | 4.8±0.3 | 3.6 | 2.28 | 30.2 | 17.1 | 517 | 1200±25% | 1000±25% | | | | |
| EE13-J | 13.25±0.3 | 7.1±0.2 | 10.0 ⁺⁰ _{-0.3} | 3.8 ⁺⁰ _{-0.3} | 9.3 | 4.8±0.2 | 6.6 | 0.81 | 31.24 | 38.44 | 1201 | | | | | | |
| EE14 | 15.7±0.30 | 7.4±0.15 | 3.0±0.1 | 3.75±0.15 | 10 | 5.2 ^{+0.3} ₋₀ | 2.7 | 1.98 | 35.04 | 17.66 | 618.8 | | | | | | 3000 MIN |
| EE1612(H) | 16.0±0.4 | 5.8±0.15 | 6.9±0.15 | 4.0±0.1 | 11.85±0.25 | 3.8±0.1 | | 0.734 | 29.38 | 40 | 1176.7 | | | 2900±25% | | | |
| EE16(CH) | 16.0±0.5 | 7.3±0.3 | 5.0±0.3 | 4.0±0.3 | 11.8 | 5.2±0.3 | 4 | 1.8 | 34.8 | 19 | 670 | 1300±25% | 1100±25% | | 2400±25% | 2800±25% | 3200±25% |
| EEL16A | 16.0±0.4 | 12.5±0.2 | 4.8±0.2 | 4.0±0.2 | 11.7 | 10.35±0.2 | 6.3 | 2.78 | 55.67 | 20.01 | 1114 | | 800±25% | | | | |
| EEL16 | 16.8±0.5 | 12.4±0.3 | 4.85±0.25 | 4.0±0.3 | 11.8 | 10.25±0.25 | 6.3 | 2.9 | 55.1 | 19 | 1048 | 950±25% | 770±25% | | 1700±25% | 2100±25% | 2500±25% |
| EE16W(H) | 16.0±0.5 | 7.3±0.3 | 6.7±0.3 | 4.0±0.3 | 11.6 | 5.2±0.3 | 6.2 | 1.44 | 37.9 | 26.2 | 993 | 2217±25% | 1350±25% | | | | |
| EE16-12W(CH) | 16.4±0.5 | 6.2±0.15 | 7.2±0.2 | 4.55±0.2 | 11.7 | 4.0±0.15 | 5.5 | 0.92 | 30.22 | 32.69 | 987.9 | | 1500±25% | | | | |
| EE16-12W-2(H) | 16.5 ^{+0.5} _{-0.4} | 7.6±0.15 | 7.9±0.15 | 4.0±0.3 | 11.6 | 5.5±0.2 | | 1.163 | 36.52 | 31.4 | 1146.8 | | | | | | |
| EF16 | 16.2±0.6 | 8.1±0.3 | 4.5±0.3 | 4.5±0.3 | 11.4 | 5.9±0.3 | 4.8 | 1.87 | 37.6 | 20.1 | 754 | 1300±25% | 1000±25% | | 2000±25% | 2600±25% | 2900±25% |
| EE17 | 16.5 ^{+0.4} _{-0.3} | 8.4 ⁺⁰ _{-0.3} | 8.4 ⁺⁰ _{-0.3} | 4.7 ⁺⁰ _{-0.3} | 11.7 | 5.7 ^{+0.4} ₋₀ | 9.1 | 1.36 | 33.99 | 24.97 | 849 | | | | | | |
| EE17W | 16.9±0.4 | 7.0±0.3 | 10.0±0.3 | 4.0±0.3 | 12.4 | 5.0±0.2 | 8.4 | 0.83 | 34.78 | 41.44 | 1441.8 | | 1800±25% | | | | |
| EE19A | 19.2±0.5 | 8.1±0.3 | 5.0±0.2 | 4.6±0.3 | 14.2 | 5.8±0.3 | 5.4 | 1.73 | 39.8 | 23 | 910 | 1400±25% | 1200±25% | | 2250±25% | 2800±25% | 3100±25% |
| EE19B | 19.2±0.5 | 8.1±0.3 | 9.5±0.3 | 4.6±0.3 | 14.2 | 5.8±0.3 | 11.1 | 0.9 | 39.9 | 44.5 | 1777.5 | 2000±25% | 1700±25% | | | | |
| EE1916D | 19.2±0.4 | 8.0±0.2 | 4.9±0.2 | 4.9±0.2 | 14.1 | 5.8±0.3 | 5.7 | 2.08 | 47.6 | 22.9 | 1090 | | 1200±25% | | | | |
| EE1918 | 19.1±0.5 | 9.9±0.25 | 5.0±0.5 | 4.55±0.5 | 14 | 7.6±0.15 | 6.8 | 2.08 | 47.6 | 22.9 | 1090 | | 950±25% | | | | |
| EEL19A(H) | 19.1±0.3 | 13.55±0.25 | 5.0±0.2 | 4.7±0.3 | 14 | 11.15±0.35 | 8.2 | 2.78 | 62.2 | 22.4 | 1393 | 1030±25% | 830±25% | | 1800±25% | 2300±25% | 2800±25% |
| EEL19B | 19.2±0.5 | 13.7±0.3 | 4.9±0.3 | 4.7±0.3 | 14 | 11.5±0.3 | 8.4 | 2.65 | 62.1 | 23.4 | 1450 | 1000±25% | 840±25% | | | | |
| EE2017 | 19.80±0.40 | 8.60±0.20 | 2.20±0.20 | 8.20±0.20 | 15.2±0.4 | 6.40±0.20 | 3.6 | 3.66 | 40.1 | 10.94 | 438.7 | | | 800±25% | | | |
| EE20W | 21.2±0.4 | 10.3±0.2 | 10.5±0.2 | 5.5±0.2 | 15.3 | 7.4±0.2 | 15.8 | 0.81 | 46.3 | 57.8 | 1475 | | 2100±25% | | | | |
| EE20-15 | 20.2±0.4 | 7.8±0.2 | 10.8±0.2 | 5.70.2 | 14.1 | 5.0±0.2 | 13 | 0.59 | 37.3 | 62.46 | 2335.7 | | 2800±25% | | | | |

EE Series


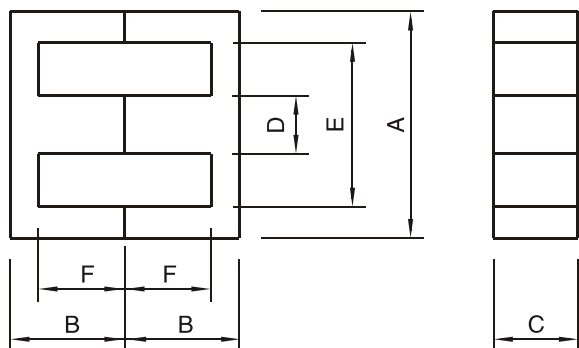


PC40 **EE16**
 | |
 Material Core Size
 OD×ID×HT

(MATERIALS): PC30 , PC40 , PC95 , H10K
 Dimensions & Effective parameter

| Type | Dimension(mm) | | | | | | Weight (g) | Effective parameter | | | | AL(nH/N ²) | | | | | |
|----------------|---------------|------------|------------|-----------|--------------------------------------|-----------|---------------|---------------------|-------|--------------------|--------------------|------------------------|----------|------|----------|----------|----------|
| | A | B | C | D | E min | F | | C1 | Le | Ae | Ve | PC30 | PC40 | PC95 | H5K | H7K | H10K |
| | | | | | | | | (mm ⁻¹) | (mm) | (mm ²) | (mm ³) | | | | | | |
| EEL20 | 20.1±0.5 | 13.9±0.3 | 4.8±0.3 | 4.8±0.3 | 14.6 | 11.7±0.3 | 8.4 | 2.55 | 62.74 | 24.5 | 1541.8 | | 860±25% | | 2800±25% | 3500±25% | 4200±25% |
| EF20 | 20.0±0.5 | 10.1±0.3 | 5.7±0.3 | 5.7±0.3 | 14.1 | 7.6±0.3 | 9 | 1.41 | 46.55 | 32.9 | 1531.9 | 1500±25% | 1250±25% | | 3300±25% | 4000±25% | 4700±25% |
| EF20 | 20.1±0.5 | 10.1±0.3 | 5.7±0.3 | 5.7±0.3 | 14.1 | 7.3±0.3 | 9 | 1.41 | 46.55 | 32.9 | 1531.9 | | | | 3300±25% | 4000±25% | 4700±25% |
| EF20-2 | 20.0±0.4 | 10.0±0.2 | 5.7±0.2 | 5.7±0.2 | 14.5±0.4 | 7.2±0.2 | | 1.497 | 47 | 31.4 | 1478 | | 1300±25% | | | | |
| EF20D(H) | 20.5±0.5 | 10.2±0.3 | 5.6±0.2 | 5.6±0.2 | 14.5 | 7.5±0.3 | 9 | 1.38 | 43 | 31 | 1340 | | 1500±25% | | | | |
| EF21-10.8-1(H) | 21.0±0.4 | 9.15±0.2 | 10.8±0.2 | 5.7±0.2 | 14.9 | 6.25±0.15 | | 1.55 | 48.7 | 31.5 | 1534.61 | | 3000±25% | | | | |
| EF21(H) | 21.0±0.50 | 10.3±0.20 | 5.70±0.25 | 5.50±0.25 | 15.2 | 7.40±0.20 | 8.6 | 1.55 | 48.7 | 31.5 | 1534.6 | | 1300±25% | | | | |
| EE22 (H) | 22.4±0.5 | 9.5±0.4 | 5.65±0.25 | 5.65±0.25 | 16 | 5.6±0.4 | 9.1 | 1.29 | 41.22 | 31.92 | 1749 | 2160±25% | 1790±25% | | 3900±25% | 4700±25% | 5600±25% |
| EE22-1(H) | 22.0±0.4 | 9.75±0.15 | 9.6±0.2 | 5.6±0.2 | 15.6 | 5.75±0.15 | | 0.71 | 43.48 | 61.02 | 2653.1 | | | | | | |
| EE22.5(H) | 22.7±0.35 | 9.65±0.15 | 16.1±0.3 | 5.7±0.3 | 16.5 | 6.2±0.15 | | 0.466 | 45.68 | 97.96 | 4474.7 | | | | | | |
| EEL22 | 22.0±0.4 | 15.0±0.4 | 5.75±0.25 | 5.75±0.25 | 15.6 | 11.3±0.2 | 13.4 | 1.82 | 63.6 | 35 | 2220 | 1600±25% | 1300±25% | | 2800±25% | 3500±25% | 4200±25% |
| EEL2222 | 22.2±0.4 | 22.2±0.4 | 4.7±0.3 | 5.8±0.3 | 15.6 | 18.2±0.2 | 15.2 | 3.15 | 93.2 | 29.6 | 2757 | | 650±25% | | | | |
| EE2318 | 23.0±0.4 | 9.0±0.15 | 8.2±0.2 | 7.2±0.2 | 16.6 | 5.4±0.15 | 13.9 | 0.72 | 42.6 | 59 | 2548 | | 2500±25% | | | | |
| EE2318W | 23.0±0.4 | 9.0±0.15 | 10.75±0.2 | 7.2±0.2 | 16.6 | 5.4±0.15 | 18.4 | 0.56 | 42.33 | 74.62 | 3159.5 | | 3000±25% | | | | |
| EE2416(H) | 24.2±0.4 | 8.2±0.15 | 16.4±0.3 | 6.0±0.2 | 17.8 | 5.2±0.15 | | 0.42 | 41.4 | 97.91 | 4061.5 | | 4500±25% | | | | |
| EE25A(H) | 25.4±0.5 | 10.0±0.3 | 6.4±0.3 | 6.0±0.3 | 18.5 | 7.0±0.3 | 11.4 | 1.28 | 49.5 | 38.4 | 2131 | 2300±25% | 1900±25% | | 4100±25% | 5100±25% | 6000±25% |
| EE25B | 25.4±0.5 | 10.0±0.3 | 6.8±0.3 | 6.0±0.3 | 18.5 | 7.0±0.3 | 12 | 1.21 | 49.5 | 40.8 | 2264 | 2300±25% | 1900±25% | | | | |
| EEL25 | 25.4±0.5 | 16.3±0.4 | 6.3±0.3 | 6.3±0.3 | 18.6 | 13.3±0.4 | 17.4 | 1.9 | 76.7 | 40.4 | 3097 | 1600±25% | 1300±25% | | 2800±25% | 3600±25% | 4300±25% |
| EE2515W | 25.00±0.4 | 7.25±0.15 | 13.8±0.30 | 7.2±0.25 | 17.6 | 2.05±0.15 | 31.2 | 0.29 | 29.4 | 99.36 | 4414 | | 4800±25% | | | | |
| EE2518W(H) | 25.05±0.75 | 9.0±0.25 | 10.75±0.3 | 7.25±0.25 | 17.8 | 5.4±0.25 | 20.3 | 0.56 | 43.6 | 77.3 | 3371 | | 3200±25% | | | | |
| EE2518H(H) | 25.45±0.4 | 9.5±0.15 | 12.95±0.3 | 7.2±0.2 | 17.3±0.4 | 5.95±0.15 | | 0.48 | 44.98 | 93 | 4182.91 | | 4500±25% | | | | |
| EE2525W | 25.05±0.75 | 12.55±0.25 | 10.75±0.3 | 7.25±0.25 | 17.5 | 8.95±0.25 | 25.7 | 0.75 | 56.92 | 77.9 | 4786 | | 2850±25% | | | | |
| EF25 | 25.0±0.6 | 12.5±0.4 | 7.0±0.4 | 7.0±0.3 | 18.3 | 9.2±0.3 | 15 | 1.22 | 57.8 | 47.2 | 2700 | 2300±25% | 1900±25% | | 4100±25% | 5100±25% | 6000±25% |
| EF25D | 25.05±0.75 | 12.55±0.25 | 7.2±0.3 | 7.25±0.25 | 17.5 | 8.95±0.25 | 17.4 | 1.06 | 57.6 | 54 | 3267 | | 1900±25% | | | | |
| EF25-1(H) | 25.4±0.7 | 12.6±0.25 | 7.2±0.25 | 7.25±0.25 | 18.6 | 9.1±0.25 | 18.5 | 1.15 | 57.96 | 50.03 | 2899 | | 1900±25% | | | | |
| EE26-14(H) | 26.05±0.4 | 6.95±0.2 | 10.75±0.3 | 7.25±0.25 | 18.5 | 3.55±0.2 | 16.8 | 0.488 | 36.82 | 75.31 | 2773 | | 3920±25% | | | | |
| EE26.5 | 26.7±0.5 | 10.8±0.3 | 11.0±0.3 | 7.2±0.3 | 19 | 6.8±0.3 | 24.2 | 0.62 | 49.8 | 79.2 | 4578 | 4000±25% | 3600±25% | | | | |
| EE2714 | 26.45±0.35 | 7.15±0.15 | 10.75±0.20 | 7.25±0.25 | 19.4 | 3.75±0.15 | 14.7 | 0.51 | 38.1 | 74.7 | 2851.5 | | | | | | |
| EE2819(H) | 28.9±0.4 | 9.2±0.15 | 10.9±0.3 | 7.3±0.25 | 20.7 ^{+0.5} _{-0.2} | 6.3±0.2 | | 0.66 | 48.61 | 73.42 | 3569.2 | | 3500±25% | | | | |
| EE28 (H) | 28.5±0.6 | 10.0±0.3 | 10.4±0.3 | 7.2±0.3 | 19 | 6.8±0.3 | 21 | 0.66 | 49.8 | 74.88 | 4259 | 5200±25% | 4000±25% | | | | |
| EE2821T(H) | 28.40±0.5 | 10.30±0.2 | 10.70±0.3 | 7.20±0.3 | 20 | 6.30±0.2 | 23 | 0.63 | 48.8 | 77 | 4534 | | 3500±25% | | | | |

EE Series

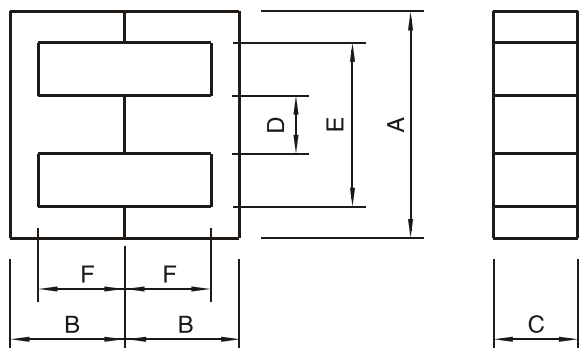

PC40 **EE16**
 | |
 Material Core Size
 OD×ID×HT

(MATERIALS): PC30 , PC40 , PC95 , H10K
 Dimensions & Effective parameter

| Type | Dimension(mm) | | | | | | Weight (g) | Effective parameter | | | | AL(nH/N ²) | | | | | |
|------------|---------------|-----------|-----------|-----------|--------------------------------------|-----------|---------------|---------------------|--------|--------------------|--------------------|------------------------|-----------|-----------|----------|----------|------|
| | A | B | C | D | E min | F | | C1 | Le | Ae | Ve | PC30 | PC40 | PC95 | H5K | H7K | H10K |
| | | | | | | | | (mm ⁻¹) | (mm) | (mm ²) | (mm ³) | | | | | | |
| EEL28 | 28.2±0.5 | 17.1±0.3 | 10.4±0.3 | 7.1±0.3 | 18.9 | 12.8±0.4 | 32 | 0.99 | 73.65 | 73.84 | 6888 | 3100±25% | 2400±25% | | | | |
| EE30 | 30.0±0.7 | 15.0±0.2 | 7.05±0.25 | 6.95±0.25 | 19.6 | 10.0±0.2 | 23.6 | 1.28 | 63 | 48.9 | 4561 | | 2300±25% | | 4600±25% | | |
| EE3011 | 30.0±0.5 | 13.2±0.2 | 10.7±0.3 | 10.7±0.3 | 19.8 | 8.1±0.2 | 35 | 0.53 | 57.8 | 110 | 6358 | | 4000±25% | | | | |
| EE33-27 | 33.0±0.6 | 14.3±0.3 | 12.5±0.3 | 9.4±0.3 | 23.6 | 10.0±0.2 | 43.8 | 0.59 | 68.24 | 114.1 | 7786.4 | | 4000±25% | | | | |
| EE35 | 35.0±0.5 | 14.5±0.25 | 9.5±0.3 | 9.5±0.3 | 25 | 10.0±0.3 | 33.2 | 0.7 | 69.2 | 98.6 | 6820 | | 3500±25% | | | 9600±25% | |
| EE3514 | 35.0±0.5 | 7.3±0.2 | 12.0±0.3 | 6.0±0.25 | 29.5±0.5 | 4.3±0.2 | 21.6 | 0.7 | 50.93 | 72 | 3666.6 | | 4300±25% | | | | |
| EE40(H) | 40.0±0.7 | 17.5±0.4 | 11.7±0.4 | 11.5±0.4 | 27.2 | 10.6±0.4 | 63.6 | 0.55 | 78.68 | 141.8 | 11161 | | 4300±25% | | | | |
| EE4133 | 41.3±0.75 | 16.8±0.2 | 12.7±0.25 | 12.7±0.25 | 28 | 10.4±0.20 | 69 | 0.47 | 77.46 | 162.1 | 12559 | | 5500±25% | | | | |
| EE42(H) | 42.1±0.9 | 21.2±0.4 | 14.9±0.3 | 12.0±0.3 | 29.5 | 15.4±0.3 | 94.4 | 0.6 | 97.8 | 180 | 17600 | 5000±25% | 3800±25% | | | | |
| EE4214 | 42.0±0.5 | 7.4±0.15 | 16.0±0.3 | 6.0±0.25 | 36 | 4.4±0.15 | 31.6 | 0.59 | 56.68 | 95.68 | 5423.4 | | | 3800±25% | | | |
| EE4220(H) | 42.1±0.9 | 21.2±0.4 | 19.9±0.3 | 12.0±0.3 | 29.5 | 15.4±0.3 | 126.4 | 0.4 | 97.8 | 242 | 24698 | | 5000±25% | | | | |
| EE50 | 50.0±1.0 | 21.5±0.25 | 14.6±0.3 | 14.5±0.3 | 35±0.7 | 12.9±0.25 | 113.6 | 0.43 | 96.82 | 225.7 | 21855.6 | | 5400±25% | | | | |
| EE5154 | 50.5±1.0 | 26.8±0.2 | 12.0±0.3 | 16.0±0.25 | 33.9 | 18.8±0.2 | 120 | 0.62 | 118.8 | 192 | 22866 | | 4700±25% | | | | |
| EE55A | 55.0±1.0 | 27.5±0.3 | 17.0±0.7 | 16.7±0.3 | 37 | 18.8±0.3 | 192 | 0.428 | 121 | 283 | 37810 | | 5500±25% | | | | |
| EE55B | 55.0±1.0 | 27.7±0.3 | 20.9±0.5 | 16.9±0.3 | 37.5 | 18.8±0.3 | 232 | 0.35 | 123 | 354 | 43542 | 8000±25% | 6500±25% | | | | |
| EE56 | 56.5±1.0 | 27.8±0.3 | 20.6±0.3 | 16.85±0.3 | 37.5 | 19.0±0.3 | 237 | 0.37 | 124.4 | 340.3 | 42336 | | 6500±25% | | | | |
| EE5625 | 56.5±1.0 | 27.8±0.3 | 24.7±0.3 | 16.85±0.3 | 37.5 | 19.0±0.3 | 282 | 0.28 | 124.25 | 438.5 | 54481.1 | | | 9000±25% | | | |
| EE65A | 65.4±1.6 | 32.6±0.6 | 19.8±0.7 | 19.8±0.7 | 44.2 | 22.6±0.6 | 309 | 0.4 | 147 | 378.9 | 58655 | 7000±25% | 5400±25% | | | | |
| EE65B (CH) | 65.4±1.6 | 32.6±0.6 | 27.0±0.6 | 19.8±0.7 | 44.2 | 22.6±0.6 | 414 | 0.274 | 147 | 540 | 79000 | 10000±25% | 7900±25% | | | | |
| EE70 | 70.0±1.5 | 33.0±0.3 | 31.75±0.8 | 21.5±0.6 | 48 | 22.5±0.3 | 560 | 0.208 | 145.5 | 700 | 101900 | | 9500±25% | 12000±25% | | | |
| EE7091 | 70.0±1.0 | 45.5±0.35 | 19.5±0.3 | 19.5±0.3 | 50 ^{+0.8} _{-0.7} | 35.5±0.35 | 411.2 | 0.52 | 203.6 | 386.1 | 78649.6 | | | 6300±25% | | | |
| EE7091B | 70.0±1.0 | 45.5±0.35 | 29.5±0.5 | 19.5±0.3 | 50 ^{+0.8} _{-0.7} | 35.5±0.35 | 621 | 0.34 | 203.6 | 584.1 | 11898 | | | 9000±25% | | | |
| EE7091C | 70.0±1.0 | 45.5±0.35 | 39.0±0.5 | 19.5±0.3 | 50.0 ^{+0.8} _{-0.7} | 35.5±0.35 | 820 | 0.26 | 203.6 | 772.2 | 157299 | | | 12500±25% | | | |
| EE80 | 80.5±1.5 | 38.0±0.4 | 20.0±0.5 | 20.0±0.4 | 60 | 28.0±0.3 | 394 | 0.446 | 183.5 | 399 | 73150 | 5200±25% | 4500±25% | | | | |
| EE85 | 85.0±1.2 | 43.5±0.5 | 26.0±0.6 | 26.4±0.6 | 56 | 30.5±0.5 | 716 | 0.27 | 196.3 | 686 | 145320 | | 7500±25% | | | | |
| EE85B | 85.0±1.2 | 43.5±0.5 | 31.0±0.6 | 26.4±0.6 | 56 | 30.5±0.5 | 856 | 0.23 | 191.2 | 818.4 | 173271 | | 9500±25% | | | | |
| EE100 | 100.0±2.0 | 60.0±0.6 | 28.0±1.0 | 28.0±1.0 | 71.5 | 46.5±1.2 | 1176 | 0.349 | 271 | 775 | 222726 | | 10000±25% | | | | |
| EE110 | 110.0±2.0 | 56.0±0.6 | 36.0±1.0 | 36.0±1.0 | 75 | 38.0±0.6 | 1564 | 0.19 | 243.1 | 1282 | 311810 | | 10000±25% | | | | |
| EE118 | 118.0±1.8 | 86.5±0.4 | 35.5±0.5 | 35.5±0.5 | 83.0 ^{+1.5} _{-1.0} | 69.0±0.4 | 2450 | 0.3 | 378.6 | 1250 | 473134 | | 7900±25% | | | | |